



PERSONAL  
COMPUTERS

# Plug Dialog

350-550 VA  
single-phase

Plug Dialog 350-550 VA



The **PLUG DIALOG** range is the ideal solution for small office and home systems (SOHO) requiring over voltage and mains failure protection. The compactness, versatility (a push-button switch with LED-based mimic panel and user-replaceable batteries) and functionality of the **PLUG DIALOG** allow it to easily fit into any small office and home environment. When the mains fails, connected loads are powered with a pseudo sine wave supply from the inverter. For additional security users can download a version of the **PowerShield<sup>3</sup>** UPS monitoring and control software.

## LOAD CONFIGURATOR

Load type	Power (VA)*
Personal computer	250
LCD Monitor	70
15" Monitor	150
Scanner, printer	200
Modem, TV, DVD reader, PlayStation, Hi-Fi, Phone, Fax	50
Laser printer**	200

\*Average estimated value. \*\*Use the PLUG DIALOG filtered power output.

## CHARACTERISTICS

- Maximum compactness
- 3 sockets with mains fail protection
- 1 socket with filtering for powering loads such as laser printers
- Integrated protection for telephone line/modem
- Cold start capability: the UPS can power up without a mains supply present
- User replaceable batteries
- USB interface
- Can be placed on a desktop, floor, or be wall-mounted
- Input supply and telephone cable included
- Short-circuit protection
- Auto restart (on mains return, after batteries have discharged)
- GS/TÜV marks
- Available with French (2P+T), UK or Schuko socket

## ADVANCED COMMUNICATION

- PowerShield<sup>3</sup> monitoring and shut-down software for Windows 95-OSR2, 98, Me, NT 4.0, 2003, XP, Vista
- Plug and Play function


## 2 YEAR WARRANTY



MODELS	PDG 400	PDG 600
POWER	350VA/225W	550VA/335W
<b>INPUT</b>		
Rated voltage	230 Vac	
Voltage range	188-262 Vac	
Frequency	50/60 Hz	
<b>OUTPUT</b>		
Voltage on mains operation	230 Vac	
Frequency on battery operation	50 or 60 Hz	
Waveform from battery/inverter	Pseudo sinewave	
<b>BATTERIES</b>		
Type	VRLA AGM Maintenance-free lead-acid	
Recharge time	6-8 h	
<b>ENVIRONMENTAL</b>		
Weight (kg)	3	3.1
Dimensions (hwd) (mm)	88 x 120 x 320	
Tel. protection	RJ11/45 connectors	
Communication	USB interface	
Safety compliance	EN 62040-1-1 and Directives 73/23 EC, 93/68 EC, EN 62040-3	
EMC conformance	EN 62040-2 and Directives 2004/108 EC, 93/68 EC	
Marks	CE; GS/TÜV	
Operating temperature	0°C - 40°C	
Colour	Graphite grey	
Altitude and relative humidity	6000 meters max. elevation, < 95% non condensing	
Accessories provided	1 input supply cable, telephone cable	



**PDG 400 - PDG 600**

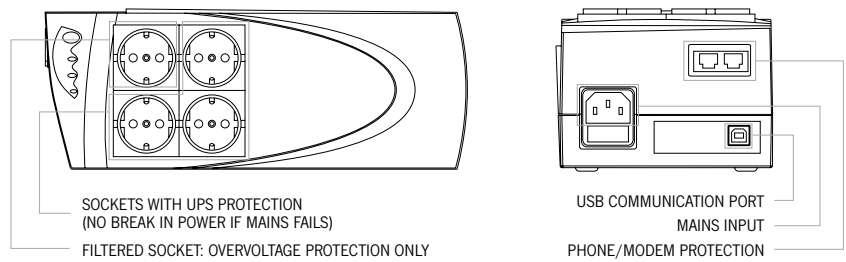

**TECHNICAL DETAILS**

