



Personal computers
Scanners, printers, modems
TV, DVD readers, Playstation, Hi-fi
Phone, fax



Plug DIALOG

350-550VA single-phase

IT RANGE

The PLUG DIALOG range is the ideal solution for small office and home systems (SOHO) requiring over voltage and mains failure protection. The compactness, versatility (a push-button switch with LED-based mimic panel and user-replaceable batteries) and functionality of the PLUG DIALOG allow it to easily fit into any small office and home environment.

When the mains fails, connected loads are powered with a pseudo sine wave supply from the inverter and battery supply. For additional security users can download a version of the PowerShield² UPS monitoring and control software from a RIELLO UPS website at www.ups-technet.com.

Plug Dialog is available in Europe with Schuko output sockets.

LOAD CONFIGURATOR

Load type	Power (VA)*
Personal computer	250
LCD Monitor	70
15" Monitor	150
Scanner, printer	200
Modem, TV, DVD reader, PlayStation, Hi-Fi, Phone, Fax	50
Laser printer**	200

*Average estimated value

**Use the Plug DIALOG filtered power output

CHARACTERISTICS


- maximum compactness
- 3 sockets with mains fail protection
- 1 socket without mains fail protection for powering loads such as laser printers
- integrated protection for telephone line/modem
- Cold Start capability: the UPS can power up without a mains supply present
- user replaceable batteries
- USB interface
- can be placed on desktop, floor, or be wall-mounted
- input supply and telephone cable included
- short-circuit protection
- auto restart (on mains return, after batteries have discharged)
- GS/TÜV marks.

ADVANCED COMMUNICATION

- PowerShield² monitoring and shut-down software for Windows 95-OSR2, 98, Me, NT 4.0, XP, 2003
- Plug and Play function.

2-YEAR WARRANTY



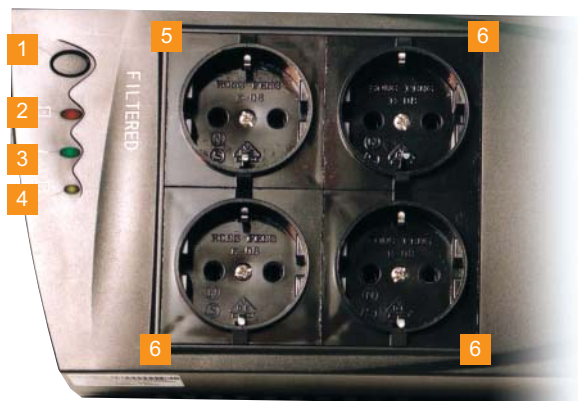

1. Main Switch On/Off
2. Battery fault or overload (flashing) shutdown (permanent)
3. UPS on with mains present (permanent)
4. UPS operating on battery power (flashing)
5. Filtered socket: overvoltage protection only
6. Sockets with UPS protection (no break in power if mains fails)

7. Mains input
8. Input fuse
9. Phone/modem protection
10. USB communication port



MODELS	PDG 400	PDG 600
POWER	350VA/225W	550VA/335W
INPUT		
Rated voltage		230 Vac
Voltage range		188-262 Vac
Frequency		50/60 Hz
OUTPUT		
Voltage on mains operation		230 Vac
Frequency on battery operation		50/60 Hz
Waveform from battery/inverter		Pseudo sinewave
BATTERIES		
Type	Maintenance free sealed lead-acid	
Recharge time	6-8 h	
ENVIRONMENTAL		
Tel. protection	RJ45 connectors	
Communication	on USB interface	
Safety compliance	EN 50091-1-1 and Directives 73/23 EEC, 93/68 EEC	
EMC conformance	EN 50091-2 cl. B and Directives 89/336 EEC, 92/31 EEC, 93/68 EEC	
Marks	CE; GS/TÜV	
Operating temperature	0 - 40 °C	
Colour	Graphite grey	
Elevation and relative humidity	6000 meters max. elevation, 0-90% non condensing	
Accessories provided	1 input supply cable, telephone cable	
Weight (kg)	3	3.1
Dimensions (hwd) (mm)	88x120x320	
Back-up (min)	7-16*	6-27*

* According to load applied.

For more information contact Riello Galatrek Ltd:

Tel: 0800 269 394 or +44-(0)1978 729 297

Email: sales@riello-ups.co.uk

Website: www.riello-ups.co.uk